


## MC605




PNEUMATIC SUPPLY:	400V/50Hz, 3 phase
SPINDLE'S MOTOR POWER:	1,3 kW
PUMP'S MOTOR POWER:	1,5 kW
WORKING PRESSURE:	130 bar ± 10%
MAX. RIM DIAMETER:	13" - 27"
MAX. WHEEL DIAMETER:	1600 mm
MAX. WHEEL WIDTH:	780 mm
MAX. WHEEL WEIGHT:	1500 kg
NOISE LEVEL:	<70 dB
WEIGHT:	560 kg
SIZE OF THE PACKAGE:	155x140x80 cm

Designed for mounting and dismantling tubeless tires ♦ for truck wheels, buses, agricultural and construction machines ♦ plate breaker and claw placed on a rotary head, allowing for quick tool change ♦ specially profiled plate breaker allows for efficient dismantling the tire without risk of damage ♦ movable platform for quick and precise wheel alignment ♦ safe control voltage (24V) eliminates the risk of electric shock ♦ electrohydraulic assembly machine with mobile wired control unit ♦ 4-jaw self-centering chuck ♦ two speeds of gripper rotation

### STANDARD EQUIPMENT

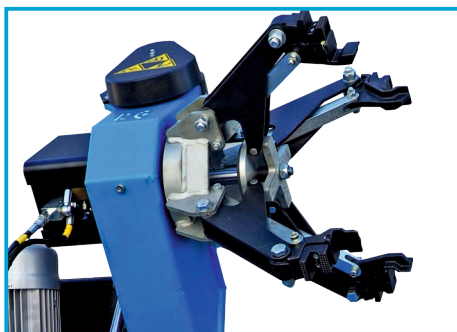

**POWERFUL MOUNTING JAWS**

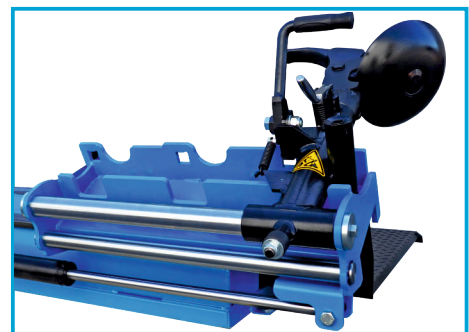

**BEAD BRAKER AND CLAW ON A ROTATING HEAD**



**TWO SPEEDS OF THE HEAD**



**MOBILE WIRED CONTROL UNIT**